

# BRAND NEW STARTER

Thank you for purchasing this starter. Please read the warning and instructions to ensure a successful installation.


## COMPUTER TESTED STARTER

STR-2502

Starter Type:  
Starter Model: STR-2502  
Rated Power: 1.40 kW  
Rated Voltage: 12.00 V  
Free Run Speed: 3834 RPM  
Free Run Current: 56 Amp  
Max Of Power: 1.55 kW  
Max Of Torque: 15.69 Nm  
Max Of Current: 585 Amp  
Ripple: 30 Amp  
Direction: CW  
Hold Current: 16 Amp  
Pull Current: 64 Amp  
Voltage Drop: 0.3733 V

PASS

Performance Curve

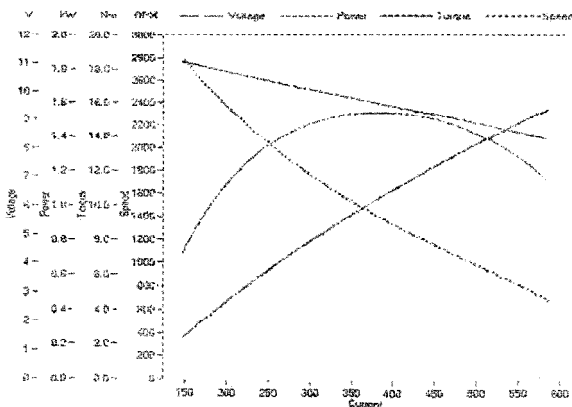

Date: 2/13/2006 Time: 18:33:57

## WARNING!

1. DISCONNECT NEGATIVE BATTERY CABLE

**CAUTION**  
Never disconnect the battery cable while the engine running

2. REMOVE OLD STARTER FROM VEHICLE

3. POSITION REPLACEMENT STARTER ON MOUNTING BRACKET, INSERT AND TIGHTEN MOUNTING BOLTS FINGER TIGHT

**CAUTION**  
Loose connections causing arcing could result in damage to the starter

4. RECONNECT WIRES SECURELY TO THEIR PROPER TERMINALS

**CAUTION**  
Please make sure terminals are connected completely, otherwise the motor may not start smoothly

5. TIGHTEN THE STARTER MOUNTING BOLTS

6. RECONNECT NEGATIVE BATTERY CABLE